

6,3 mm


Dimensions in the tab sector DIN46342, part1

Werkstoff/Matière/Material


.2 = Bronze/bronze




.4 = Kupfer/cuivre/copper



.6 = Messing/laiton/brass

						
Artikelnummer Numéro d'article Part-No.	3866u.6	03866u.6	3866p.6	03866p.6	3866ab.6	3866r.6
Bohrung/Trou/Hole	Ø 0.9 T 4.5 L 8.5 L1 15.3 B1 8 A 5 øD 1.65 B 1 S 0.4	Ø 0.9 T 4.5 L 8.5 L1 15.3 B1 8 A 5 øD 1.65 B 1 S 0.4	Ø 0.95 T 3 L 28.5 L1 31.5 B1 6.3 A 2.5 øD 1.65 B 0.8 S 0.8	Ø 0.95 T 3 L 28.5 L1 31.5 B1 6.3 A 2.5 øD 1.65 B 0.8 S 0.8	Ø 1.1 T 2.6 L 8.1 L1 13.2 B1 8 A 5 øD 1.65 B 1.1 S 0.8	Ø 1.1 T 3 L 32.5 L1 35.5 B1 6.3 A 5 øD 1.8 B 1 S 0.8
Werkzeuge Outils Toolings	40	1046u	38	1046p	23	38

							
Artikelnummer Numéro d'article Part-No.	3866z.6	03866z.6	3865z.6	3866g.6	03866g.6	3865t.7	3865f.7
Bohrung/Trou/Hole	Ø 1.1 T 3.5 L 8.5 L1 14.3 B1 8 A 5 øD 1.65 B 1 S 0.8	Ø 1.1 T 3.5 L 8.5 L1 14.3 B1 8 A 5 øD 1.65 B 1 S 0.8	Ø 1.1 T 4 L 13.3 L1 25.3 B1 7.5 A 5.08 øD 1.6 B 1 S 0.8	Ø 1.1 T 4.5 L 8.5 L1 15.3 B1 8 A 5 øD 1.65 B 1 S 0.8	Ø 1.1 T 4.5 L 8.5 L1 15.3 B1 8 A 5 øD 1.65 B 1 S 0.8	Ø 1.15 T 3.6 L 8 L1 24.8 B1 8 A 5.08 øD 1.65 B 1 S 0.8	Ø 1.2 T 3 L 8 L1 38.2 B1 7.5 A 6.5 øD 1.7x3.9 B 1 S 0.8
Werkzeuge Outils Toolings	23	1046z	23	23	1046v	23	23



								
Artikelnummer Numéro d'article Part-No.	3865s.7	3865r.6	3866t.6	03866t.6	3866ac.6	3868l.6	03868l.6	3868p.6
Bohrung/Trou/Hole	Ø 1.2 T 3 L 8 L1 38.2 B1 7.5 A 6.5 øD 1.65 B 1 S 0.8	Ø 1.2 T 6.5 L 14 L1 23 B1 6.3 A øD 1.65 B 1.2 S 0.8	Ø 1.3 T 1.5 L 8 L1 14.4 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 1.5 L 8 L1 14.4 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 2 L 8 L1 16.3 B1 8 A 5 øD 1.65 B 1.2 S 0.8	Ø 1.3 T 2.5 L 13.5 L1 16 B1 6.3 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 2.5 L 13.5 L1 16 B1 6.3 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 2.7 L 11.7 L1 14.4 B1 6.3 A 4 øD 1.6 B 1.3 S 0.8
Werkzeuge Outils Toolings	23	23	23	1046r	23	23	1047l	23

							
Artikelnummer Numéro d'article Part-No.	3865u.6	03865u.6	3866c.2	03866c.2	3866c.6	03866c.6	3866q.6
Bohrung/Trou/Hole	Ø 1.3 T 3 L 8 L1 15.7 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3 L 8 L1 15.7 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.5 L 8.5 L1 14.5 B1 8 A 5 øD 1.3 B 1.3 S 0.8	Ø 1.3 T 3.5 L 8.5 L1 14.5 B1 8 A 5 øD 1.3 B 1.3 S 0.8	Ø 1.3 T 3.5 L 8.5 L1 14.5 B1 8 A 5 øD 1.3 B 1.3 S 0.8	Ø 1.3 T 3.5 L 8.5 L1 14.5 B1 8 A 5 øD 1.3 B 1.3 S 0.8	Ø 1.3 T 3.5 L 8.2 L1 16 B1 8 A 5 øD 1.3 B 1.3 S 0.8
Werkzeuge Outils Toolings	23	1046	23	1046c	23	1046c	23


								
Artikelnummer Numéro d'article Part-No.	3865k.6	3865y.6	3868t.6	03868t.6	3866a.2	03866a.2	3866a.6	03866a.6
Bohrung/Trou/Hole	Ø 1.3 T 3.5 L 9 L1 17 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.5 L 9 L1 18.3 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.5 L 13.5 L1 32.5 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.5 L 13.5 L1 32.5 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.6 L 8 L1 14.2 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.6 L 8 L1 14.2 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.6 L 8 L1 14.2 B1 8 A 5 øD 1.65 B 1.3 S 0.8	Ø 1.3 T 3.6 L 8 L1 14.2 B1 8 A 5 øD 1.65 B 1.3 S 0.8
Werkzeuge Outils Toolings	23	23	23		23	1046	23	1046

					
Artikelnummer Numéro d'article Part-No.	3866a.9	3866v.6	3866x.6	03866x.6	3866y.6
Bohrung/Trou/Hole	Ø 1.3	Ø 1.3	Ø 1.3	Ø 1.3	Ø 1.3
	T 3.6	T 3.6	T 3.6	T 3.6	T 4
	L 8	L 8	L 8	L 8	L 44
	L1 14.2	L1 14.2	L1 14.2	L1 14.2	L1 48
	B1 8	B1 8	B1 8	B1 8	B1 6.3
	A 5	A 5	A 5	A 5	A 4
	øD 1.65	øD 3.2	øD 3.5	øD 3.5	øD
	B 1.3	B 1.3	B 1.3	B 1.3	B 1.3
	S 0.8	S 0.8	S 0.8	S 0.8	S 0.8
Werkzeuge Outils Toolings	23	23	23	1046	38


				
Artikelnummer Numéro d'article Part-No.	3866b.2	03866b.2	3866b.6	03866b.6
Bohrung/Trou/Hole	Ø 1.3	Ø 1.3	Ø 1.3	Ø 1.3
	T 4.1	T 4.1	T 4.1	T 4.1
	L 8	L 8	L 8	L 8
	L1 16.8	L1 16.8	L1 16.8	L1 16.8
	B1 8	B1 8	B1 8	B1 8
	A 5	A 5	A 5	A 5
	øD 1.65	øD 1.65	øD 1.65	øD 1.65
	B 1.3	B 1.3	B 1.3	B 1.3
	S 0.8	S 0.8	S 0.8	S 0.8
Werkzeuge Outils Toolings	23	1046q	23	1046q

						
Artikelnummer Numéro d'article Part-No.	3866l.6	03866l.6	3866f.6	03866f.6	3866f.9	03866f.9
Bohrung/Trou/Hole	Ø 1.4	Ø 1.4	Ø 1.5	Ø 1.5	Ø 1.5	Ø 1.5
	T 2.6	T 2.6	T 2.7	T 2.7	T 2.7	T 2.7
	L 8.1	L 8.1	L 16	L 16	L 16	L 16
	L1 13.2	L1 13.2	L1 18.7	L1 18.7	L1 18.7	L1 18.7
	B1 8	B1 8	B1 6.3	B1 6.3	B1 6.3	B1 6.3
	A 5	A 5	A 4	A 4	A 4	A 4
	øD 1.65	øD 1.65	øD 1.65	øD 1.65	øD 1.65	øD 1.65
	B 1.35	B 1.35	B 1.45	B 1.45	B 1.45	B 1.45
	S 0.8	S 0.8	S 0.8	S 0.8	S 0.8	S 0.8
Werkzeuge Outils Toolings	23	1046y	23	1046f	23	1046f

						
Artikelnummer Numéro d'article Part-No.	3865l.6	03865l.6	3865m.6	3866m.6	03866m.6	3867m.6
Bohrung/Trou/Hole	Ø 1.5 T 3 L 17 L1 20 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8	Ø 1.5 T 3 L 17 L1 20 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8	Ø 1.5 T 3 L 17 L1 20 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8	Ø 1.5 T 3 L 20 L1 23 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8	Ø 1.5 T 3 L 20 L1 23 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8	Ø 1.5 T 3 L 20 L1 23 B1 6.3 A 4 øD 1.65 B 1.5 S 0.8
Werkzeuge Outils Toolings	38	1046l	38	38	1046m	38


						
Artikelnummer Numéro d'article Part-No.	3865q.6	03865q.6	3865p.6	03865p.6	3866s.2	03866s.2
Bohrung/Trou/Hole	Ø 1.5 T 4 L 15 L1 20.5 B1 8 A 5 øD 1.65 B 1.425 S 0.8	Ø 1.5 T 4 L 15 L1 20.5 B1 8 A 5 øD 1.65 B 1.425 S 0.8	Ø 1.5 T 4 L 26.5 L1 32 B1 8 A 5 øD 1.15 B 1.425 S 0.8	Ø 1.5 T 4 L 26.5 L1 32 B1 8 A 5 øD 1.15 B 1.425 S 0.8	Ø 1.5 T 6 L 8.2 L1 16 B1 8 A 5 øD 1.8 B 1.45 S 0.8	Ø 1.5 T 6 L 8.2 L1 16 B1 8 A 5 øD 1.8 B 1.45 S 0.8
Werkzeuge Outils Toolings	23	1047q	38	1048p	23	1046s

0.250" (6.35mm) Tabs / Quick Disconnect Terminals

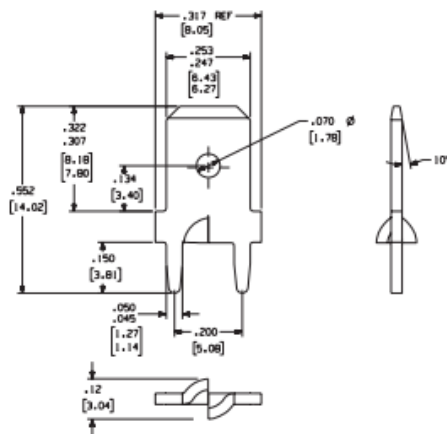


Part Numbers 1021, 6021, 1198, 6198

Loose Part No.	1021	1198
Reeled Part No.	6021	6198
Dim 'A'	0.134" (3.40mm)	0.160" (4.06mm)
Feature 'B'	0.070" (1.78mm) HOLE	0.070" (1.78mm) DIMPLE
Mounting Type	Outward or Inward Splay	
Material Thickness / Type	0.032" (0.81mm) Brass	
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper	
Mounting Hole Diameter	0.058" ±0.003" (1.47mm ±0.076)	
Current Rating	20 Amperes	
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY	

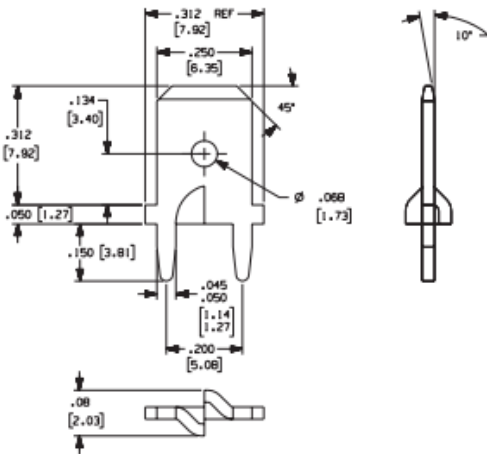


Part Numbers 1061, 6061

Loose Part No.	1061
Reeled Part No.	6061
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ±0.003" (1.47mm ±0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

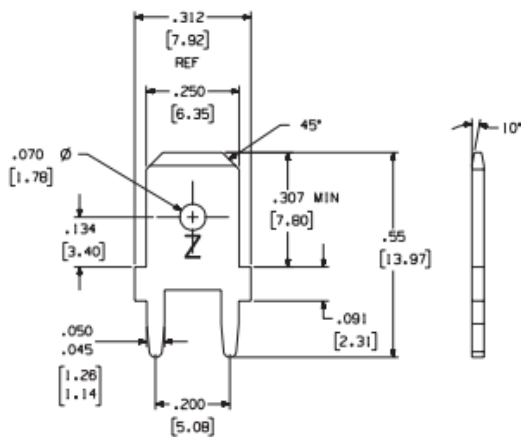

Part Numbers 836, 6836


Loose Part No.	836
Reeled Part No.	6836
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ±0.003" (1.47mm ±0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

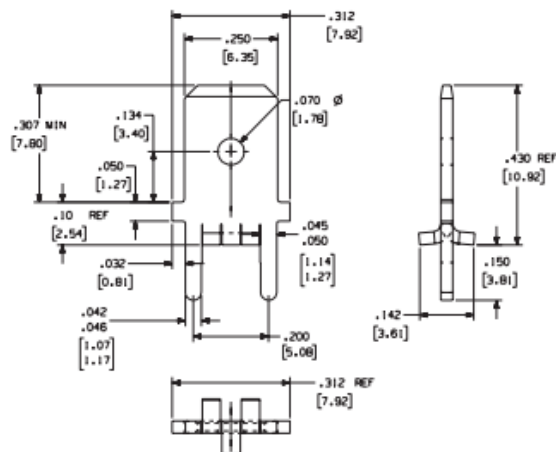

Part Number 6284


Loose Part No.	N/A
Reeled Part No.	6284
Mounting Type	Drop-In Fit
Hole Dimension	0.070" (1.78mm) hole
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 AMPS
Feeder/Applicator System	For SMT Applications: Surf-Shooter SMT Continuous Strip Feeder For THT Applications: Model 9700 Model 9700 XY

Zierick recommends .006" stencil thickness for most applications. For other stencil thicknesses, call Zierick's product development department.

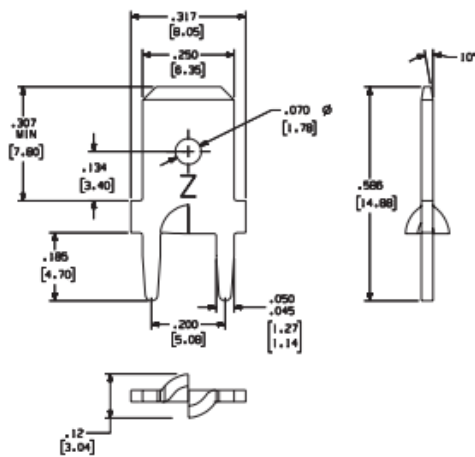


Part Numbers 1060, 6060

Loose Part No.	1060
Reeled Part No.	6060
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

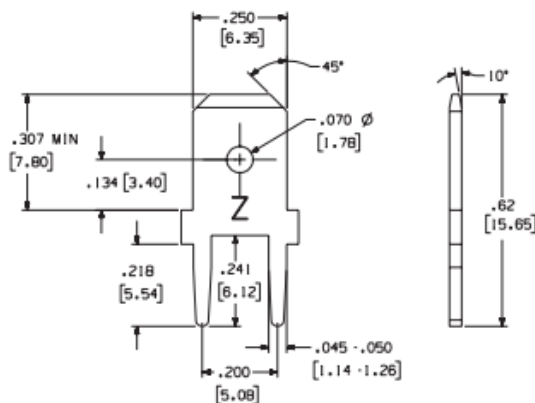



Part Number 906

Loose Part No.	906
Reeled Part No.	N/A
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	ZPT81-A

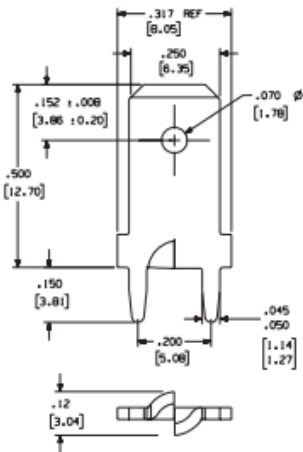


Part Numbers 1045, 6045

Loose Part No.	1045
Reeled Part No.	6045
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

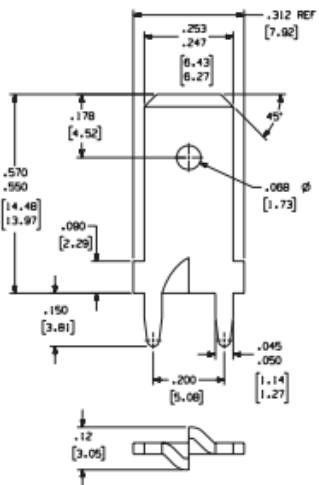


Part Numbers 1041, 6041

Loose Part No.	1041
Reeled Part No.	6041
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

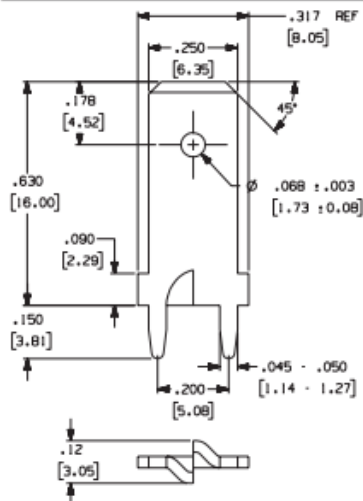


Part Numbers 1057, 6057

Loose Part No.	1057
Reeled Part No.	6057
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

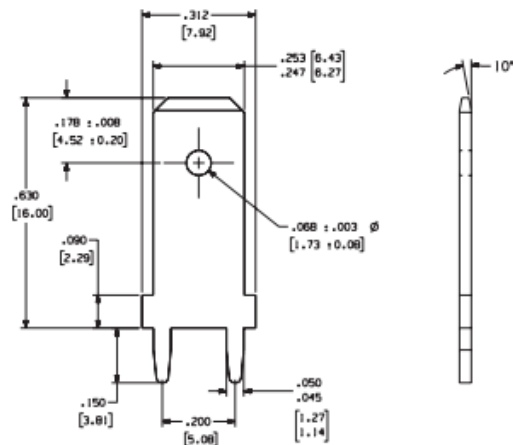


Part Numbers 972, 6224

Loose Part No.	972
Reeled Part No.	6224
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

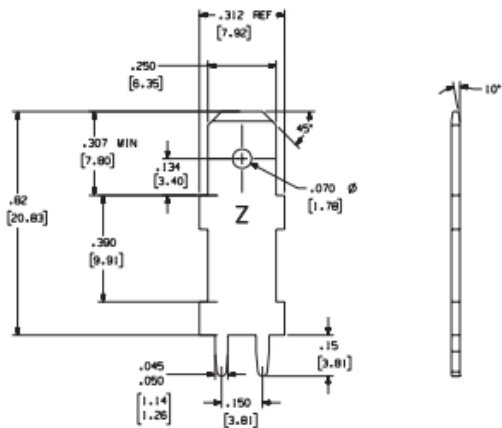


Part Number 953-MOD

Loose Part No.	953-MOD
Reeled Part No.	N/A
Mounting Type	Outward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	ZPT81-A

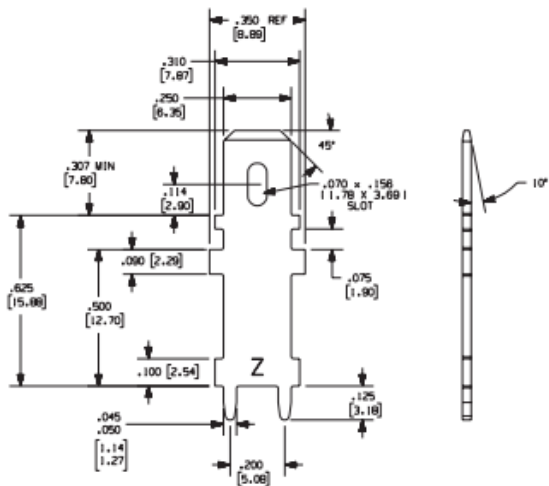


Part Numbers 1113, 6113

Loose Part No.	1113
Reeled Part No.	6113
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" ± 0.003" (1.47mm ± 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

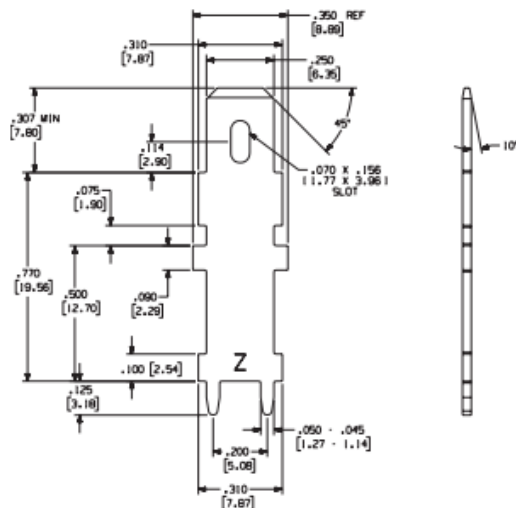


Part Numbers 1112, 6112

Loose Part No.	1112
Reeled Part No.	6112
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

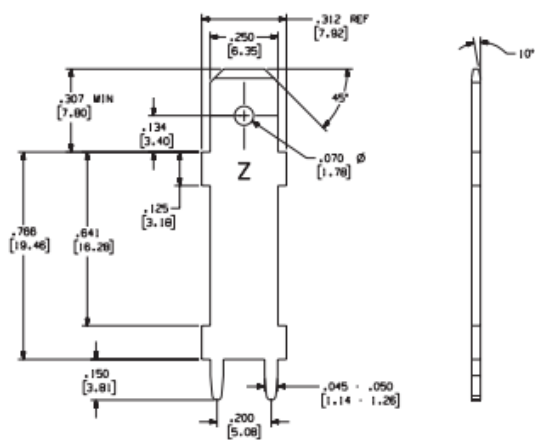

Part Number 953

Loose Part No.	953
Reeled Part No.	N/A
Mounting Type	Outward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	ZPT81-A

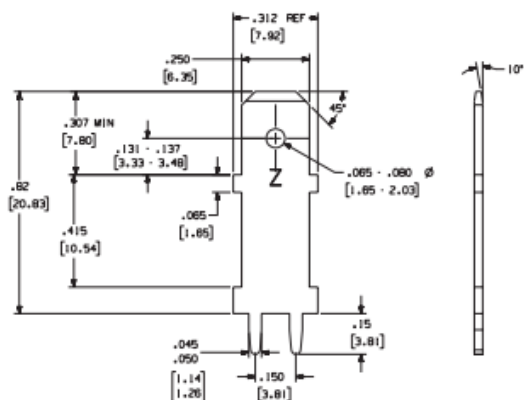


Part Number 6110

Loose Part No.	N/A
Reeled Part No.	6110
Mounting Type	Outward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	Model 9700, 9700 XY



Loose Part No.	1173
Reeled Part No.	6173
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	20 Amperes
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY

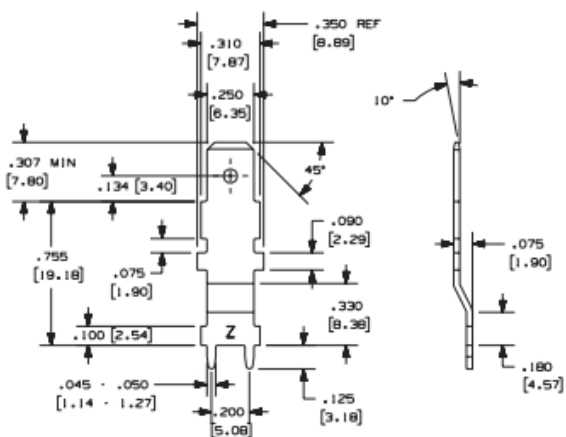

Loose Part No.	1131
Reeled Part No.	N/A
Mounting Type	Outward or Inward Splay
Material Thickness / Type	0.032" (0.81mm) Brass
Standard Finish	100% Tin over Copper
Mounting Hole Diameter	0.058" $\pm$ 0.003" (1.47mm $\pm$ 0.076)
Current Rating	30 Amperes
Applicator System	ZPT81-1131

