


4,8 mm

Dimensions in the tab sector DIN 46247, part 2

Werkstoff/Matière/Material
.6 = Messing/laiton/brass



Artikelnummer
Numéro d'article
Part-No.

Bohrung/Trou/Hole

3826f05.6

Ø 1.3

B2 4.8x0.5

T 4

L 8

L2 7

B1 2.5

A 5


B 1.3

S 0.35

Belastbarkeit
Capacité de charge
electrical load
Werkzeuge
Outils
Toolings

10 A

36



3826f08.6

Ø 1.3

B2 4.8x0.8

T 4

L 8

L2 7

B1 2.6


A 5

B 1.3

S 0.35

10 A

36



3826q08.6

Ø 1.3

B2 4.8x0.8

T 4

L 8

L2 7

B1 2.7


A 5

B 1.3

S 0.35

10 A

36



3867fd.6

Ø 1.3

B2

T

L

L2

B1


A

B

S

10 A


0.187" (4.75mm) Tab Receptacles

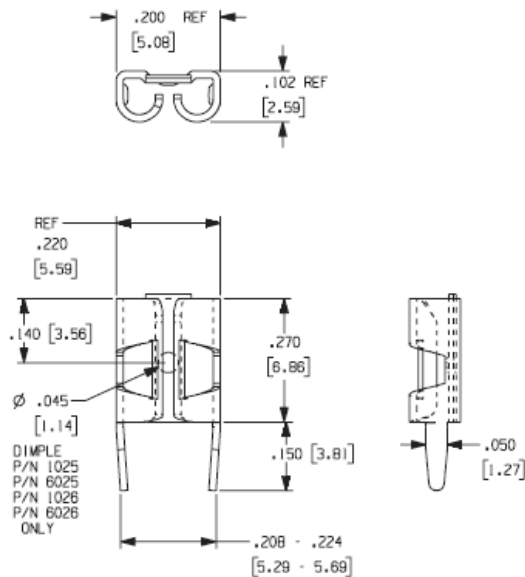

Part Numbers 1241, 6241, 1026, 6026, 1025, 6025

Loose Part No.	1241	1026	1025
Reeled Part No.	6241	6026	6025
Mating Terminal Size	0.187" x 0.015" (4.75mm x 0.38mm) Tab	0.187" x 0.020" (4.75mm x 0.51mm) Tab	0.187" x 0.032" (4.75mm x 0.81mm) Tab
Mounting Type	Outward or Inward Splay		
Material Thickness / Type	0.016" (0.41mm) Brass		
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper		
Mounting Hole Diameter	2 holes 0.058" $\pm$ 0.003" (1.473mm $\pm$ 0.076mm) on 0.200" $\pm$ 0.003" (5.08mm $\pm$ 0.076mm) centers		
Current Rating	15 Amperes		
Resistance Rating	10mOhm Max		
Temperature Rating	-65° to 85°C		
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9700 XY		


Universal Tab Receptacles for 0.025" (0.64mm) and 0.032" (0.81mm) Thick Terminals

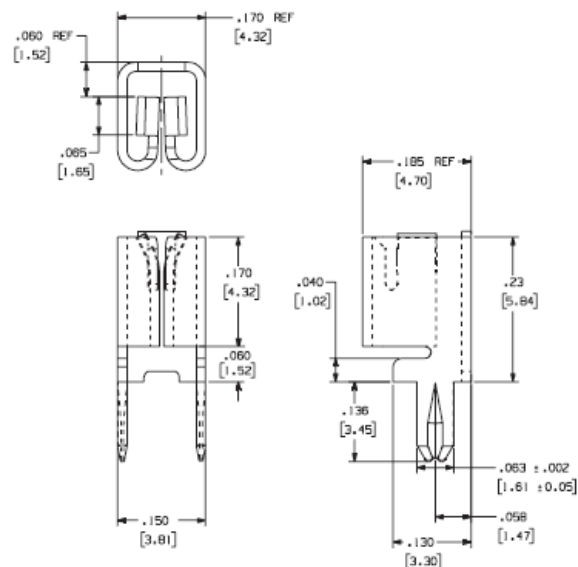

Part Numbers 1092, 6092, 1092T-KT, 1274, 1274T, 6274

Loose Part No.	1092	1274
Reeled Part No.	6092	6274
Taped Part No.	1092T-KT	1274T
Mating Terminal Size	0.025" (0.64mm) and 0.032" (0.81mm)	0.020" (0.51mm) and 0.032" (0.81mm)
Mounting Type	Split Leg Inward Splay	
Material Thickness / Type	0.016" (0.41mm) Brass	
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper	
Mating Entry	Top and Horizontal	
Mounting Hole Diameter	2 holes 0.066" $\pm$ 0.003" (1.68mm $\pm$ 0.076mm) on 0.134" $\pm$ 0.003" (3.40mm $\pm$ 0.076mm) centers	
Current Rating	20 Amperes	
Resistance Rating	10mOhm Max	
Temperature Rating	-65° to 85°C	
Applicator System	Loose: ZPT81-1092 Reeled: Model 9700, 9700 XY	

Universal Tab Receptacles for 0.025" (0.64mm) and 0.032" (0.81mm) Thick Terminals

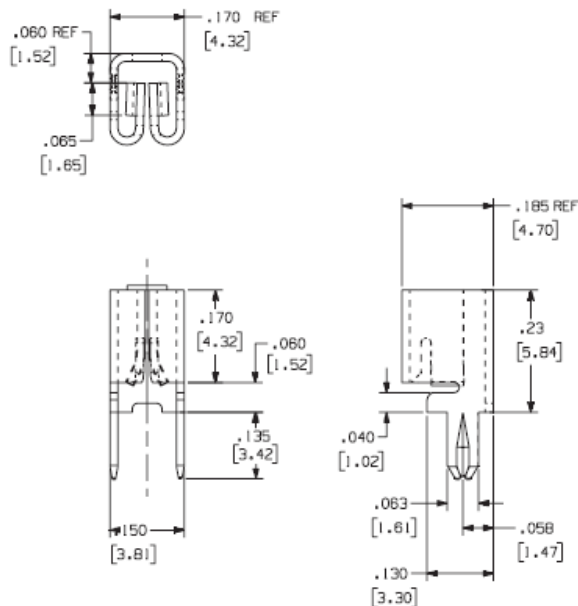

Part Numbers 1118, 1118T, 6118, 1188, 6188

Loose Part No.	1118	1188
Reeled Part No.	6118	6188
Taped Part No.	1118T	N/A
Mating Terminal Size	0.025" (0.64mm) and 0.032" (0.81mm)	0.015" (0.38mm) and 0.025" (0.64mm)
Mounting Type	Split Leg Outward Splay	
Material Thickness / Type	0.016" (0.41mm) Brass	
Standard Finish	Loose: 100% Tin over Copper Reeled: 100% Tin over Copper	
Mating Type	Bottom and Horizontal	
Mounting Hole Diameter	2 holes 0.066" $\pm$ 0.003" (1.68mm $\pm$ 0.76mm) on 0.134" $\pm$ 0.003" (3.40mm $\pm$ 0.76mm) centers	
Current Rating	20 Amperes	
Resistance Rating	10mOhm Max	
Temperature Rating	-65° to 85°C	
Applicator System	Loose: ZPT81-1092 Reeled: Model 9700, 9700 XY	



Catalog 43

Made in USA

131 Radio Circle, Mount Kisco, NY 10549
800.882.8020 ■ 914.666.2911 ■ Fax: 914.666.0216
001.914.666.2911 www.zierick.com

Recommended PCB Layouts for Universal Tab Receptacles

