



- Material: PBT (UL)/Nylon 66 (UL)
- Flame Class: 94V-2/94V-0
- Color: Natural/Black
- Unit: mm


防止高壓跳火，耐高溫，提高可靠度增進美觀。




Part No.	A	C	D	E	F	H	I	Package
TC-1	16.0	6.2	10.7	8.0	3.5	3.4	0.8	500
TC-1A	19.3	6.2	10.7	10.0	3.6	3.2	0.8	
TC-1C	17.8	6.3	10.7	9.3	3.5	3.3	0.9	
TC-16	22.5	6.3	10.5	15.0	3.5	3.5	0.8	
TC-18	16.0	6.2	10.7	8.0	3.5	3.5	0.5	




Part No.	Package
TC-5A	500




Part No.	Package
TC-9	500




Part No.	A	C	D	E	H	I	Package
TC-6	13.0	6.2	10.7	6.8	3.3	0.8	500
TC-7	13.0	7.0	10.7	6.8	3.0	2.1	
TC-10	14.3	6.2	10.5	8.2	3.2	1.0	
TC-11	14.3	7.0	10.7	8.2	2.7	2.1	
TC-22	13.0	6.7	10.7	7.1	2.8	2.0	
TC-56	14.3	6.2	10.5	8.2	3.2	0.5	




Part No.	Package
TC-46	500




Part No.	Package
TC-75	1000




Part No.	Package
TC-4	1000




Part No.	Package
TC-21	1000

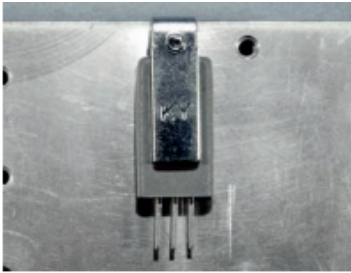

- Material: Zinc Plated SPCC
- Unit: mm




Part No.	Package
TRK-11	500




Part No.	Package
TRK-54	500



- Material: Zinc Plated Steel
- Unit: mm




Part No.	Package
TRK-1	250




Part No.	Package
TRK-2	250




- Material: SUS
- Unit: mm




Part No.	Package
TRK-6	1000




Part No.	Package
TRK-67	1000

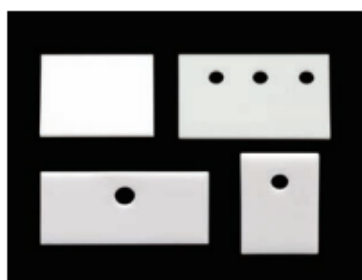

- Material: Ceramic
- Color: Natural
- Unit: mm




Part No.	Package
CHSA-1	100




Part No.	A	B	C	D	E	F	H	I	Package
CHSA-2	37.7	22.0	32.0	20.5	9.5	6.0	1.55	3.7	50
CHSA-4	34.8	20.0	28.8	17.3	5.8	4.0	1.0	3.7	100
CHSA-5	42.0	20.0	33.8	20.2	6.0	4.0	1.0	3.7	50
CHSA-6	30.0	13.6		15.0		4.5	1.0	3.5	100
CHSA-7	16.0	21.0		8.0		5.9	2.5	3.5	



- Material: Ceramic
- Color: White
- Unit: mm



Part No.	A	B	D	F	H	I	Package
TO-3PAWO	15.0	21.9	7.5	6.0	1.6	3.5	200
TO-220AWO	13.7	19.0	6.85	5.0	2.0	3.8	100

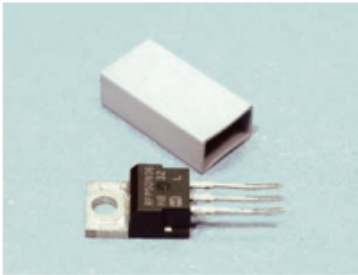


- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm


絕緣件用途：



Part No.	A	B	Package
TO-3PCV	28.5	17.5	1000
TO-3PCV-C	25.0	17.5	
TO-220CV	21.7	11.5	




Part No.	A	B	C	E	Package
SRT-111158	11.0	11.5	5.8	0.45	2000
SRT-111758	16.0	11.4	5.5	0.45	1000
SRT-182864	28.5	18.0	6.4	0.75	
SRT-203464	35.0	20.0	6.4	0.75	



- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm

絕緣件用途：

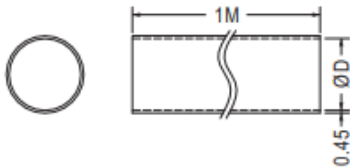


Part No.	D
SRT6	6.0
SRT8	8.0
SRT10	10.0
SRT12	12.0
SRT14	14.0
SRT16	16.0
SRT18	18.0



- Material: Silicon (UL)
- Flame Class: 94HB/94V-0
- Color: Gray
- Unit: mm

用途：用於大電解電容之外殼絕緣，絕緣性特佳。




Part No.	D	L	Package
SCT-0726	7.8	26.0	500
SCT-1315	13.0	15.0	
SCT-1615	16.7	15.0	
SCT-1825	18.5	25.0	



- Material: Silicon Rubber (UL)
- Flame Class: 94V-0
- Color: Black
- Unit: mm


零件特征



Part No.	Package
BCCA-1210	500




- Material: Soft P.V.C
- Color: Natural
- Unit: mm



- 如需UL認可材質，請在料號尾碼加UL下單
- Please add UL after Part Number for UL certified material.

Part No.	A	B	C	D	E	Package
HU-8	8.5	7.5	10.0	3.0	3.0	1000
HU-10	10.5	9.0	12.3	3.0	4.0	
HU-12	12.0	10.0	15.0	3.8	4.8	




- 如需UL認可材質，請在料號尾碼加UL下單
- Please add UL after Part Number for UL certified material.


Part No.	A	C	D	F	Package
HU-14	14.0	16.0	4.0	22.0	1000
HU-16	16.0	19.0	5.0	32.0	



- Material: Soft P.V.C
- Color: Black
- Unit: mm



Part No.	Package
VC0707008	1000






Part No.	Package
VC907413	500



- Material: PBT/PC V-2/PC V-0/POM/
PPS/N46 V-0/N6 V-2/
N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm

散熱片間造成短路。



[TW-109]

[TW-131, TW-148, TW-179]



Part No.	A	B	C	D	E	Package
TW-1	6.0	3.6	3.0	1.5	1.5	2000
TW-2	6.2	3.5	3.0	3.0	1.5	
TW-3	6.2	3.55	3.0	2.5	2.0	
TW-4	6.0	3.5	3.0	2.0	2.0	
TW-5	6.2	3.5	3.0	1.2	1.0	
TW-6	6.2	3.5	3.0	1.4	1.2	
TW-7	8.0	3.8	3.1	2.8	1.2	
TW-8	8.0	3.8	3.1	1.2	1.2	
TW-9	10.0	6.0	5.0	5.0	1.0	
TW-10	10.0	5.0	4.0	4.0	1.0	
TW-11	9.5	6.3	4.5	1.2	1.2	1000
TW-12	9.5	6.3	4.1	0.8	1.7	
TW-14	9.9	8.3	6.5	1.5	1.0	2000
TW-15	6.2	3.6	3.0	2.4	1.9	
TW-16	6.1	3.5	3.0	1.6	1.4	
TW-17	6.1	3.55	3.0	1.5	2.0	
TW-18	6.35	5.15	3.5	1.6	0.6	
TW-20	6.5	3.5	3.0	4.0	0.9	
TW-21	7.0	5.0	3.0	5.8	2.0	
TW-22	11.9	7.9	4.0	3.0	2.6	
TW-23	7.1	5.0	3.0	2.3	2.0	
TW-24	6.4	3.55	2.95	2.0	1.3	
TW-25	7.92	4.83	3.05	0.8	1.14	
TW-26	6.0	3.6	3.0	5.2	1.0	
TW-27	6.0	3.55	2.95	1.4	1.4	
TW-29	14.0	7.5	6.0	1.8	1.2	
TW-30	14.0	9.8	6.6	1.7	0.9	
TW-31	16.0	11.4	10.0	0.8	0.7	
TW-33	6.0	3.5	2.5	7.2	5.0	1000
TW-34	6.0	3.5	2.5	11.0	5.0	
TW-35	6.0	3.55	2.95	1.2	1.3	
TW-36	15.7	9.7	4.5	6.5	5.0	
TW-37	6.0	3.55	2.95	3.2	2.0	
TW-38	6.1	3.5	2.95	1.5	1.1	
TW-39	5.46	3.43	2.95	0.81	1.02	
TW-41	6.6	4.95	2.6	6.0	1.5	
TW-42	6.35	4.78	3.94	1.57	3.18	
TW-43	25.4	11.0	8.3	2.29	1.58	
TW-48	11.0	8.0	5.5	8.0	1.3	2000
TW-49	6.4	3.53	3.0	2.0	1.2	
TW-53	11.8	6.0	4.0	1.9	0.5	
TW-57	10.0	4.3	3.45	3.0	1.0	
TW-58	6.2	3.5	3.0	2.5	2.7	

Part No.	A	B	C	D	E	Package
TW-59	6.2	3.5	3.0	2.5	2.0	2000
TW-60	6.4	3.5	3.0	2.0	1.3	
TW-61	6.0	3.5	3.0	3.2	2.0	
TW-62	6.1	3.5	3.0	1.5	1.1	
TW-63	10.0	5.0	3.95	4.0	0.5	
TW-64	4.0	2.7	2.1	0.8	0.8	
TW-65	6.0	3.55	3.0	4.6	2.0	
TW-70	6.2	3.6	2.95	2.9	1.9	
TW-73	9.0	6.0	4.5	8.0	2.0	
TW-75	7.0	4.4	3.2	7.5	0.5	
TW-77	5.0	4.1	2.2	1.2	1.2	
TW-78	21.0	17.4	16.2	2.8	0.8	
TW-79	6.0	3.6	2.95	2.4	1.2	
TW-80	6.0	3.6	2.95	4.8	1.2	
TW-84	6.2	3.6	2.95	12.0	1.9	
TW-85	6.1	3.5	2.9	1.85	1.4	
TW-88	6.0	3.5	3.0	2.3	1.8	
TW-90	6.3	3.5	3.0	2.6	1.2	
TW-97	9.0	3.5	3.0	3.5	1.0	
TW-99	6.0	3.8	3.1	6.5	1.2	
TW-100	6.1	3.5	3.0	2.1	1.4	
TW-101	6.1	3.5	3.0	2.7	1.4	
TW-102	12.7	6.7	4.3	1.5	1.46	
TW-104	15.0	7.9	6.2	4.0	1.5	
TW-106	9.5	6.5	5.1	10.7	1.5	
TW-107	6.2	3.5	3.0	2.9	1.9	
TW-108	6.4	3.5	3.0	2.0	1.2	
TW-109	17.0	9.3	6.7	3.3	2.5	
TW-110	9.5	6.0	3.7	1.5	1.0	
TW-111	6.0	3.4	2.7	2.5	1.0	
TW-113	6.0	3.55	3.0	1.6	1.3	
TW-115	6.3	3.5	3.0	2.6	2.0	
TW-123	8.2	4.65	4.05	3.6	0.5	
TW-127	6.2	3.5	3.0	4.1	2.0	
TW-131	12.0	6.6	4.2	1.9	3.8	
TW-135	13.0	7.9	6.6	2.4	1.7	
TW-136	6.2	3.55	3.0	0.6	1.2	
TW-143	6.3	3.9	3.2	1.5	2.5	
TW-145	12.0	8.0	3.0	3.0	1.4	
TW-146	14.0	8.1	3.1	1.8	2.5	
TW-148	7.6	3.9	3.1	4.0	2.0	
TW-149	6.2	4.1	3.2	2.0	1.0	1000
TW-150	7.6	3.5	3.1	4.0	2.0	2000




- Material: PBT/PC V-2/PC V-0/POM/
PPS/N46 V-0/N6 V-2/
N66 V-2/N66 V-0
- Color: Natural/Black
- Unit: mm


85A 85V 1T 14J 152 154 7UL PEP ~



【 TW-178 】



【 TW-214 】



【 TW-240,TW-289 】

Part No.	A	B	C	D	E	Package
TW-151	6.1	3.5	3.0	2.25	2.0	2000
TW-153	6.1	3.5	3.0	0.8	2.0	
TW-156	6.0	3.5	3.0	0.9	1.3	
TW-157	6.2	3.5	3.0	4.6	2.0	
TW-159	25.0	10.0	8.2	12.0	4.5	500
TW-160	4.0	2.7	2.1	0.7	0.8	2000
TW-161	6.5	4.25	3.2	4.0	3.0	
TW-162	13.0	6.5	4.5	8.0	5.0	500
TW-163	24.0	11.2	9.0	3.0	1.1	1000
TW-165	12.0	7.6	6.1	16.5	2.0	
TW-168	6.2	3.5	3.0	2.0	1.9	2000
TW-169	14.0	8.6	7.95	5.0	2.0	
TW-171	13.0	7.9	6.6	6.4	1.7	
TW-172	10.36	6.1	5.59	4.75	1.57	
TW-173	6.0	4.2	3.2	3.5	0.6	
TW-175	10.0	6.3	4.2	10.5	7.0	
TW-176	10.0	6.3	4.2	15.5	7.0	
TW-177	11.0	8.2	5.5	15.0	2.0	
TW-178	16.0	7.0	4.15	4.2	1.8	1000
TW-179	14.0	7.6	5.2	2.0	3.0	2000
TW-182	6.0	3.8	3.2	1.1	2.9	
TW-185	6.0	3.5	2.5	5.2	3.1	
TW-186	6.0	3.5	2.5	8.6	3.1	
TW-188	15.75	10.0	6.5	19.0	3.0	500
TW-189	15.75	10.0	6.5	39.0	3.0	250
TW-192	6.2	4.3	3.1	2.0	1.0	2000
TW-194	5.0	3.6	2.95	4.8	1.2	
TW-198	8.7	5.4	4.6	6.5	2.0	
TW-199	8.1	3.6	2.95	2.5	1.3	
TW-202	4.8	3.0	2.6	3.5	1.2	
TW-203	3.0	2.0	0.9	3.5	0.5	
TW-204	6.2	3.55	2.95	8.0	2.2	
TW-207	11.0	6.2	5.0	4.9	1.0	
TW-208	11.1	6.35	5.1	6.35	7.9	
TW-209	8.0	4.25	3.2	3.0	2.0	
TW-213	6.5	5.4	5.1	2.5	1.0	
TW-214	13.0	6.0	3.85	0.8	1.2	
TW-215	9.0	6.0	4.0	6.3	2.0	
TW-219	4.6	3.0	2.3	1.6	1.2	
TW-222	3.0	1.8	0.9	1.0	0.5	
TW-223	6.0	3.1	2.6	1.5	1.0	
TW-224	20.0	11.9	6.5	2.5	3.0	1000
TW-225	11.0	8.0	5.5	8.0	3.0	

Part No.	A	B	C	D	E	Package
TW-226	4.2	3.0	2.6	1.0	2.25	2000
TW-227	23.7	13.0	10.0	13.0	2.0	500
TW-228	23.7	13.0	10.0	23.0	2.0	
TW-229	20.0	11.0	8.1	8.0	2.0	1000
TW-230	20.0	11.0	8.1	13.0	2.0	500
TW-234	8.0	4.4	3.2	0.9	2.0	2000
TW-235	13.0	7.9	6.6	1.6	1.7	
TW-237	13.0	9.8	4.5	10.3	2.0	1000
TW-240	8.0	4.65	3.7	12.0	1.0	2000
TW-242	6.1	3.55	3.0	1.5	0.9	
TW-243	10.5	9.5	8.0	0.7	1.0	
TW-245	11.5	7.5	6.7	2.0	1.0	
TW-246	15.0	7.9	4.2	2.0	1.5	
TW-249	8.5	5.75	5.2	3.0	1.2	
TW-250	8.7	5.2	4.4	0.8	1.6	1000
TW-252	16.0	8.0	5.0	1.55	0.85	
TW-253	22.0	16.0	10.5	4.5	1.5	1000
TW-256	8.7	5.2	4.4	4.7	1.6	2000
TW-257	12.0	9.0	6.0	6.0	2.0	
TW-258	20.0	12.0	8.0	10.0	3.0	1000
TW-259	20.0	12.0	8.0	7.0	2.0	
TW-260	10.0	7.0	5.0	10.0	1.0	2000
TW-261	20.0	10.0	8.0	3.0	3.0	1000
TW-262	20.0	12.0	10.0	2.0	3.0	
TW-263	25.0	12.0	10.0	5.0	1.0	
TW-264	18.0	16.0	12.0	9.0	1.0	
TW-266	15.0	7.9	6.2	2.0	2.0	2000
TW-268	15.0	9.9	8.2	2.0	1.5	
TW-270	20.0	10.0	8.0	12.0	3.0	1000
TW-273	15.0	8.9	6.2	3.0	1.5	2000
TW-274	16.0	12.0	10.0	4.0	2.0	
TW-275	10.0	7.0	5.0	2.0	1.0	1000
TW-276	26.0	16.0	14.0	5.0	5.0	
TW-278	12.0	8.0	5.0	7.0	2.0	2000
TW-279	12.0	6.0	4.0	15.0	2.0	1000
TW-282	12.0	8.0	6.0	3.0	1.0	2000
TW-283	14.0	8.0	6.0	3.0	3.0	
TW-284	16.0	12.0	10.0	3.0	1.0	
TW-287	16.0	8.0	6.0	6.0	5.0	
TW-289	27.5	20.8	20.2	9.2	0.8	1000
TW-291	12.0	7.0	5.0	6.0	2.0	2000
TW-292	5.5	3.5	3.0	2.6	0.6	
TW-301	19.0	9.4	8.2	1.7	0.8	1000